




STAINLESS STEEL CABLE




CORROSION RESISTANT FASTENERS



WING NUT PLUG

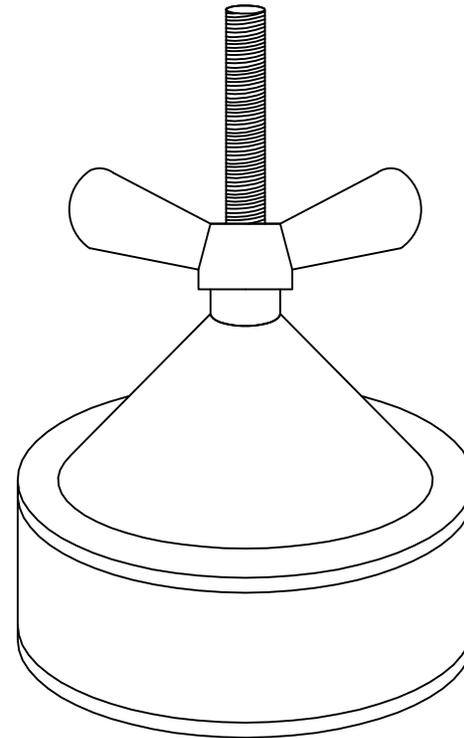

IDENTIFICATION TAG

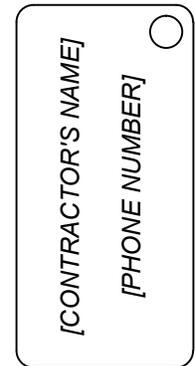

NOTES:

1. PLUG SHALL BE INSTALLED ON THE DOWNSTREAM OUTLET.
2. PLUG SHALL BE SECURED TO A MINIMUM OF 2 MANHOLE STEPS BY STAINLESS STEEL CABLE WITH CORROSION-RESISTANT FASTENERS.
3. PLUG ASSEMBLY SHALL BE TAGGED WITH CONTRACTOR'S NAME & CONTACT NUMBER ON A CORROSION-RESISTANT PLATE.
4. PLUGGED MANHOLE SHALL BE MAINTAINED CONTINUALLY TO ALLOW ACCESS TO THE PLUG.